RIVERSIDE DISTRIBUTION CENTER

4410 INDUSTRIAL PARKWAY

CONSTRUCTION DOCUMENTS - ISSUED FOR BID

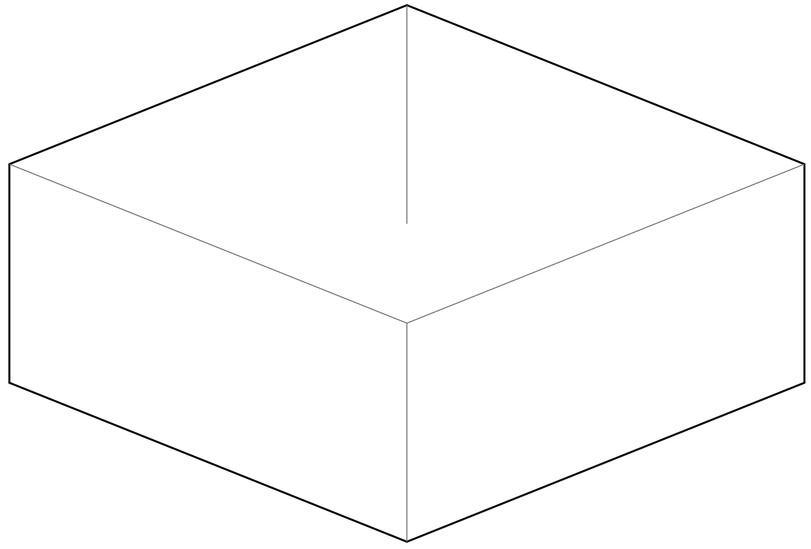

DRAWING INDEX

G0.01	COVER SHEET
S1.01	FOUNDATION PLAN
S1.02	ROOF FRAMING PLAN
S2.01	STRUCTURAL SECTIONS AND DETAILS
A1.01	FIRST FLOOR PLAN
M1.01	MECHANICAL AND PLUMBING PLAN
E1.01	ELECTRICAL LIGHTING PLAN

PROJECT DATA

BUILDING AREA: 15,000 SF (150'-0" x 100'-0")
CONSTRUCTION TYPE: II-B, STEEL FRAME
ROOF: 1.5B 20GA METAL DECK ON 24K6 JOISTS
FOUNDATIONS: SPREAD AND CONTINUOUS FOOTINGS
SLAB ON GRADE: 6" CONCRETE, 4000 PSI

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT
RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO.
2026-118

DATE
04/02/2026

DRAWN
JRM

CHECKED
KLT

SHEET TITLE
COVER SHEET

SHEET NUMBER
G0.01

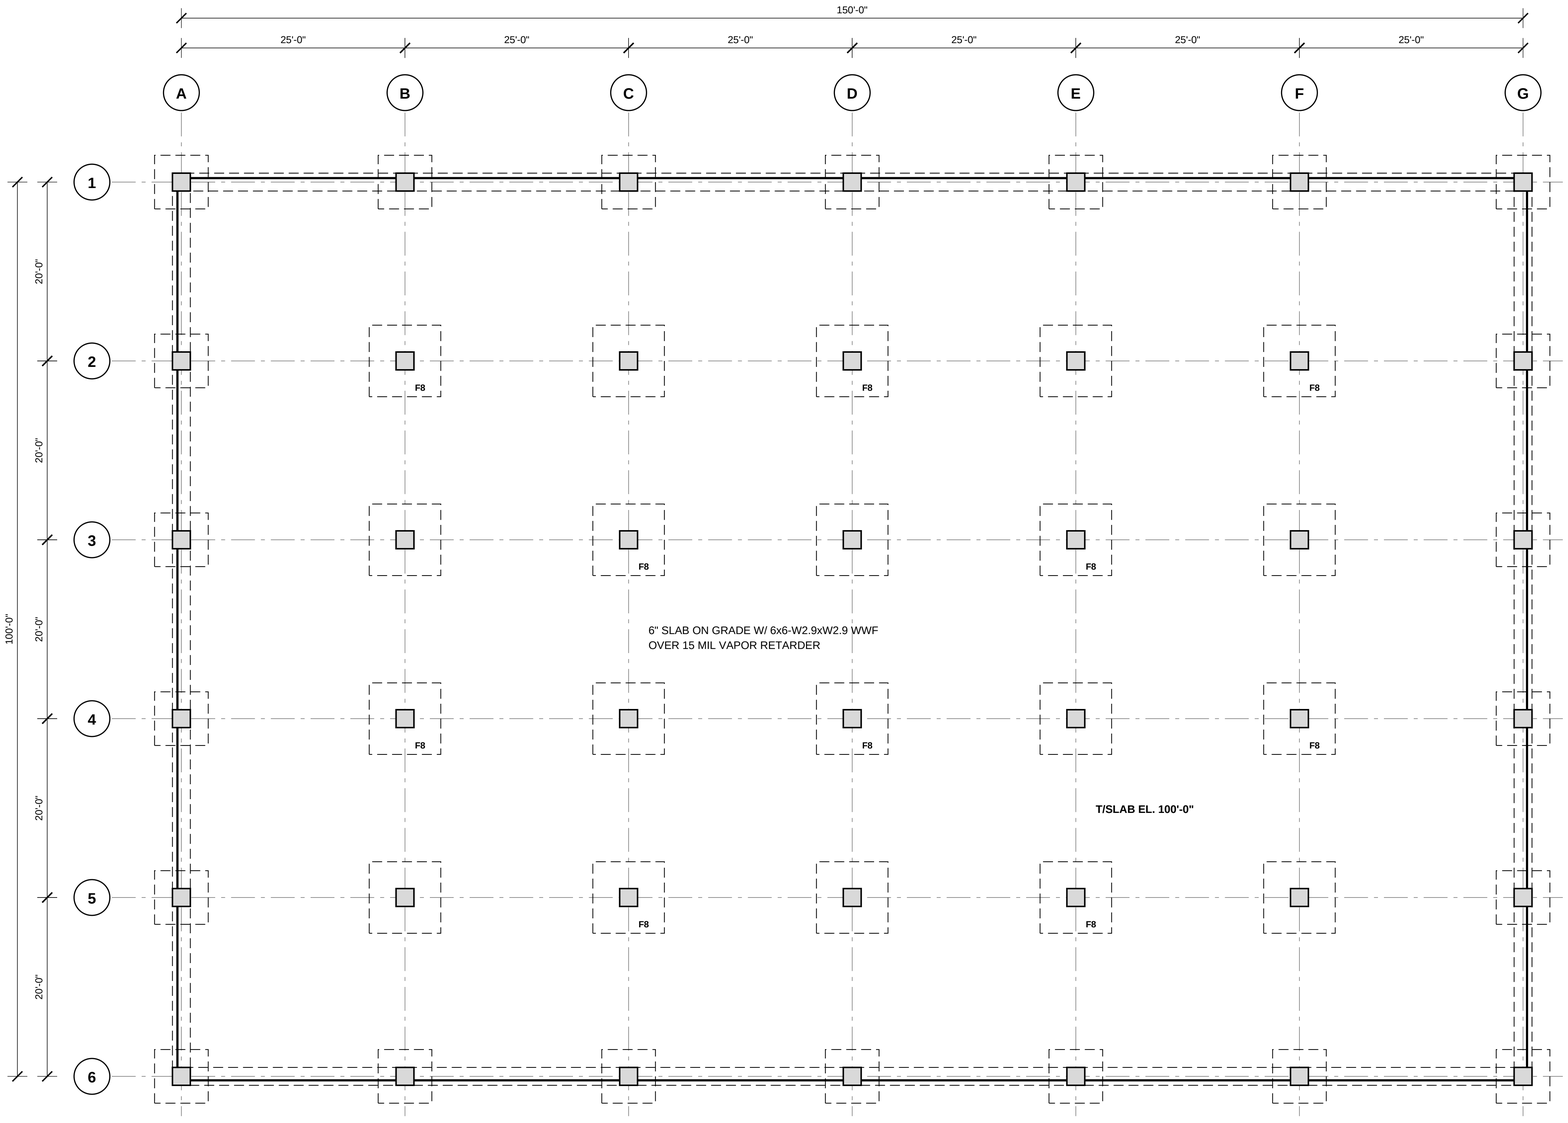

1 **FOUNDATION PLAN**

SCALE: 1/8" = 1'-0"

FOOTING SCHEDULE

MARK	SIZE	REINF.
F6	6'-0" x 6'-0" x 1'-6"	(7) #5 E.W.
F8	8'-0" x 8'-0" x 2'-0"	(9) #6 E.W.
CF	2'-0" WIDE x 1'-0"	(3) #5 CONT.

FOUNDATION NOTES

1. ALLOWABLE SOIL BEARING PRESSURE = 3000 PSF.
2. CONCRETE: 4000 PSI AT 28 DAYS.
3. ANCHOR RODS: ASTM F1554 GR. 36, (4) 3/4" DIA.
4. BASE PLATES: PL 3/4" x 12" x 12", ASTM A36.
5. GROUT UNDER BASE PLATES: 1 1/2" NON-SHRINK.
6. TOP OF FOOTING EL. 97'-0" U.N.O.

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO.	DATE
2026-118	04/02/2026
DRAWN	CHECKED
JRM	KLT

SHEET TITLE

FOUNDATION PLAN

SHEET NUMBER

S1.01

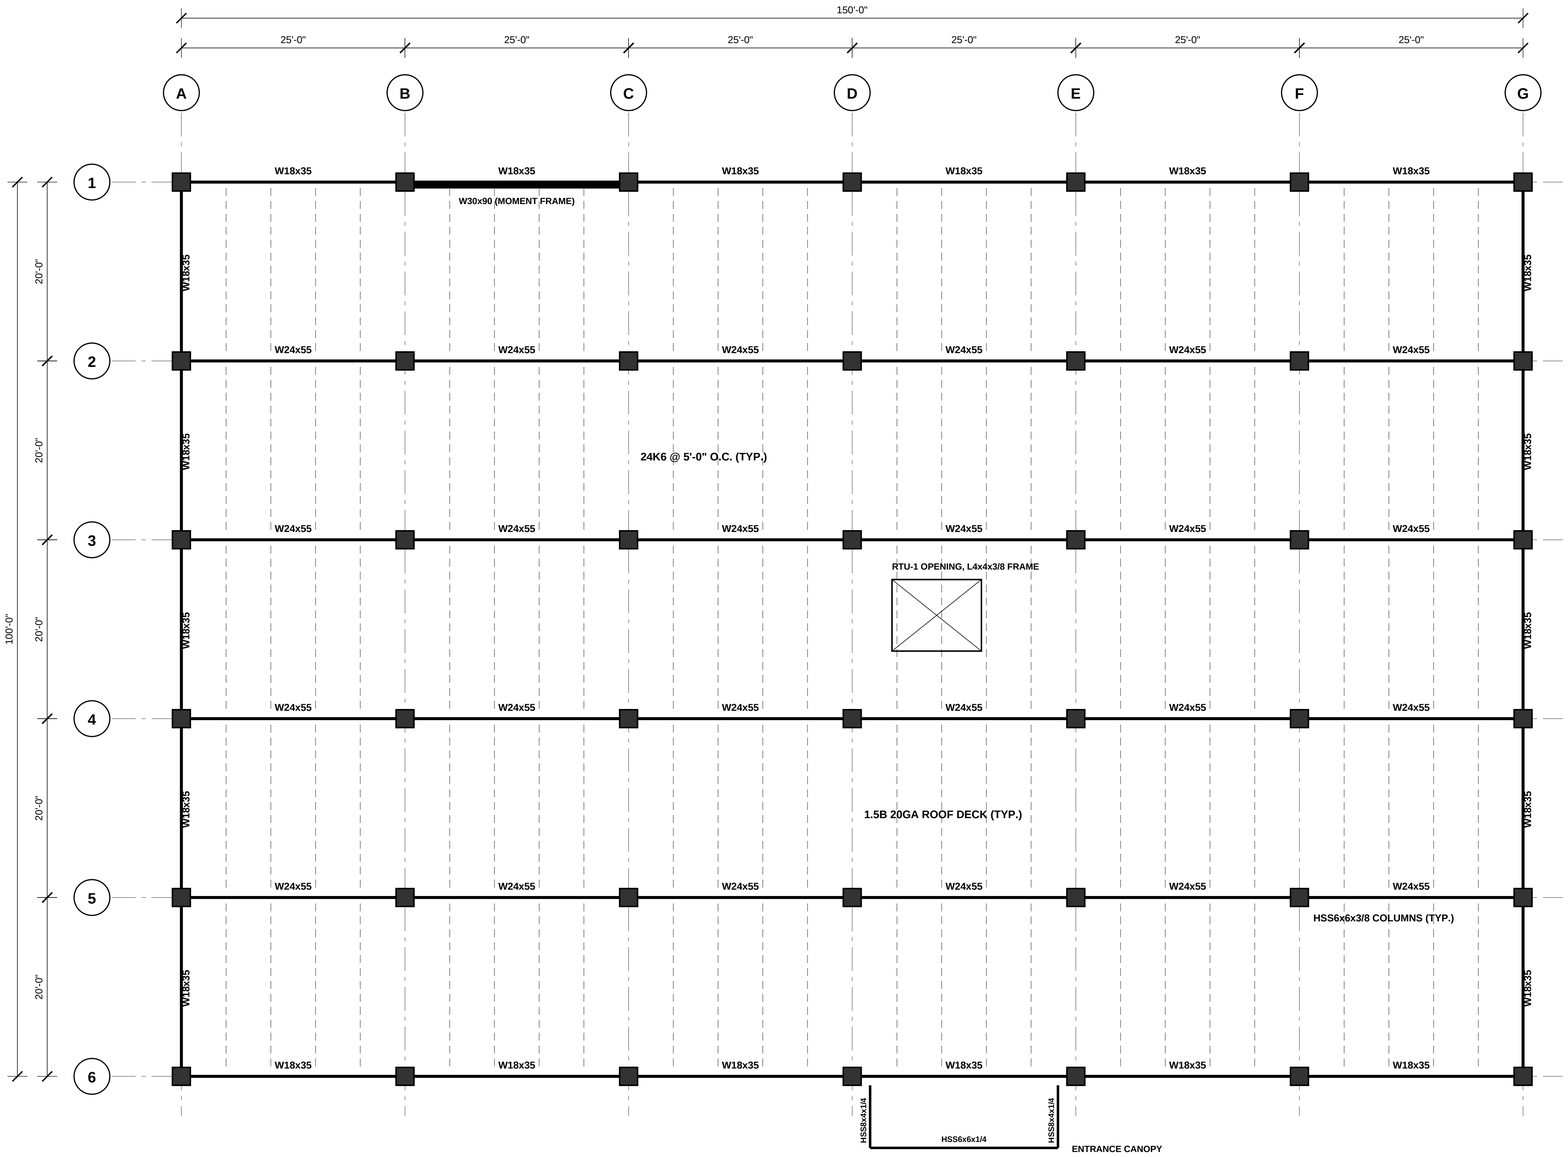

1 **ROOF FRAMING PLAN**

SCALE: 1/8" = 1'-0"

FRAMING NOTES

1. STRUCTURAL STEEL: W SHAPES ASTM A992; HSS ASTM A500 GR. C.
2. ANGLES, CHANNELS AND PLATES: ASTM A36.
3. T/STEEL EL. 124'-0" U.N.O.
4. JOISTS: SJI K-SERIES, BRIDGING PER SJI.
5. ROOF DECK: 1.5" TYPE B, 20 GA, GALVANIZED.
6. BEAM CONNECTIONS: SEE 1/S2.01.

MEMBER LEGEND

W24x55 INTERIOR GIRDER
W18x35 PERIMETER BEAM
W30x90 MOMENT FRAME BEAM
HSS6x6x3/8 COLUMN

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO.	DATE
2026-118	04/02/2026
DRAWN	CHECKED
JRM	KLT

SHEET TITLE

ROOF FRAMING PLAN

SHEET NUMBER

S1.02

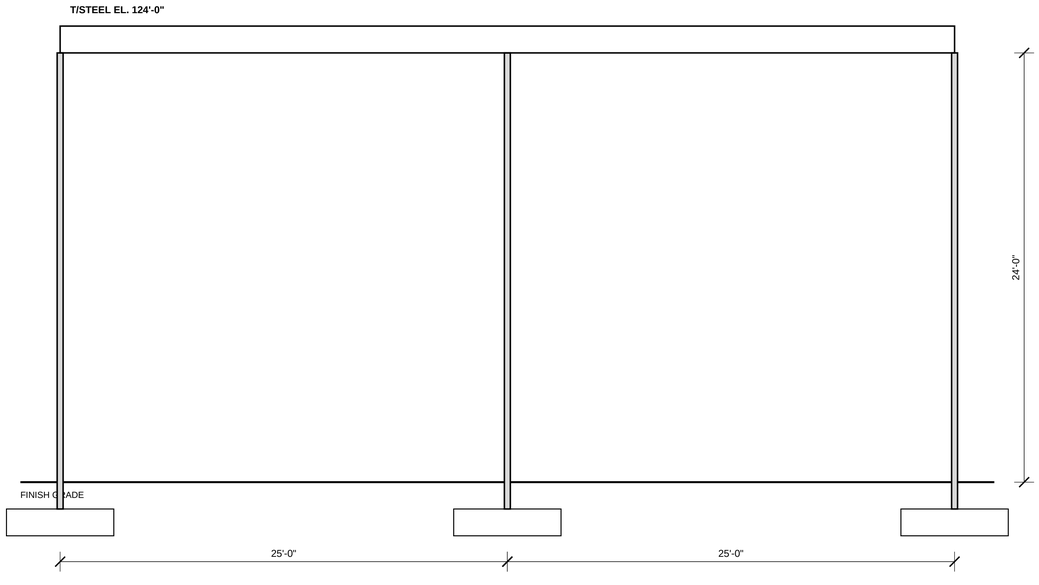

3 BUILDING SECTION

SCALE: 1/4" = 1'-0"

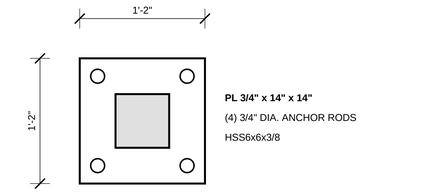

PL 3/4" x 14" x 14"

(4) 3/4'' DIA. ANCHOR RODS

HSS6x6x3/8

2 COLUMN BASE PLATE

SCALE: 1 1/2" = 1'-0"

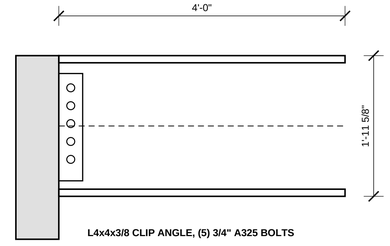

L4x4x3/8 CLIP ANGLE, (5) 3/4" A325 BOLTS

1 TYPICAL BEAM CONNECTION

SCALE: 1" = 1'-0"

GENERAL NOTES

DETAILS ON THIS SHEET ARE DRAWN AT DIFFERENT SCALES.
CALIBRATE EACH DETAIL (VIEWPORT) INDEPENDENTLY BEFORE MEASURING.

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO.	DATE
2026-118	04/02/2026
DRAWN	CHECKED
JRM	KLT

SHEET TITLE

STRUCTURAL SECTIONS AND DETAILS

SHEET NUMBER

S2.01

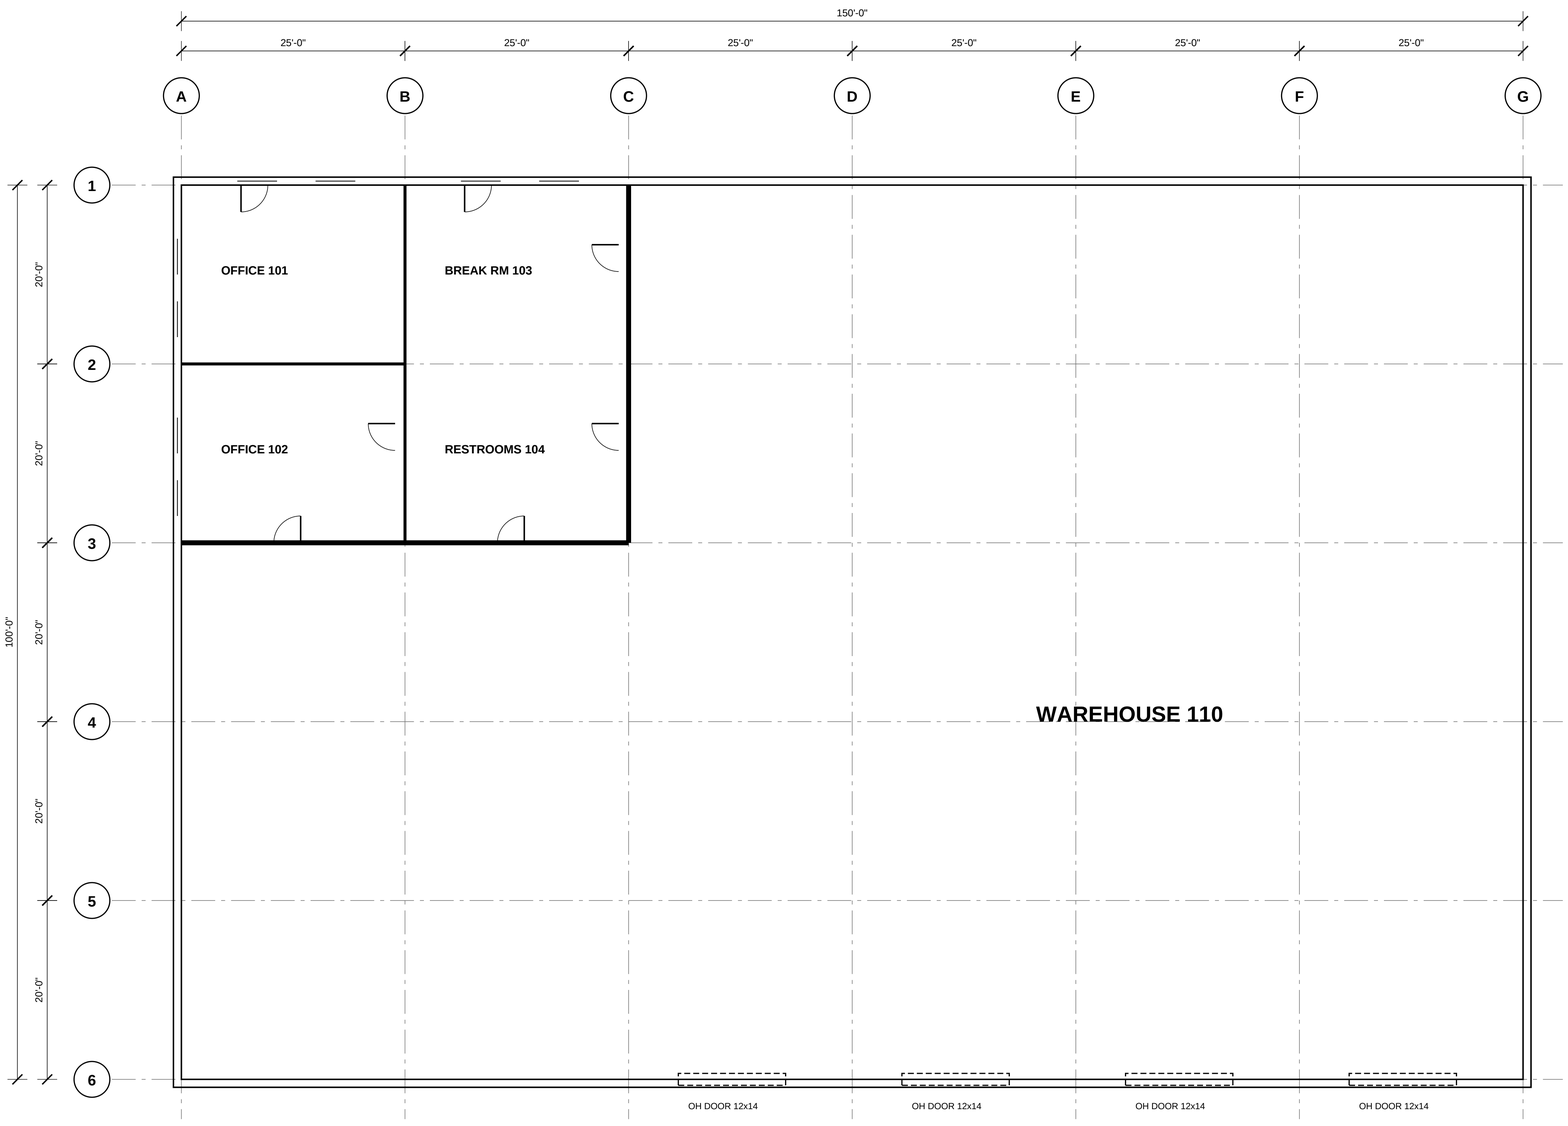

PLAN NOTES

1. DIMENSIONS ARE TO GRID LINES U.N.O.
2. OFFICE WALLS: 3 5/8" MTL STUD, GYP. BD. EACH SIDE.
3. SEE A6.01 FOR DOOR AND WINDOW SCHEDULES.

1 **FIRST FLOOR PLAN**

SCALE: 1/8" = 1'-0"

NORTHPOINT

STRUCTURAL ENGINEERS

1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE

DISTRIBUTION CENTER

4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO.	DATE
2026-118	04/02/2026
DRAWN	CHECKED
JRM	KLT

SHEET TITLE

FIRST FLOOR PLAN

SHEET NUMBER

A1.01

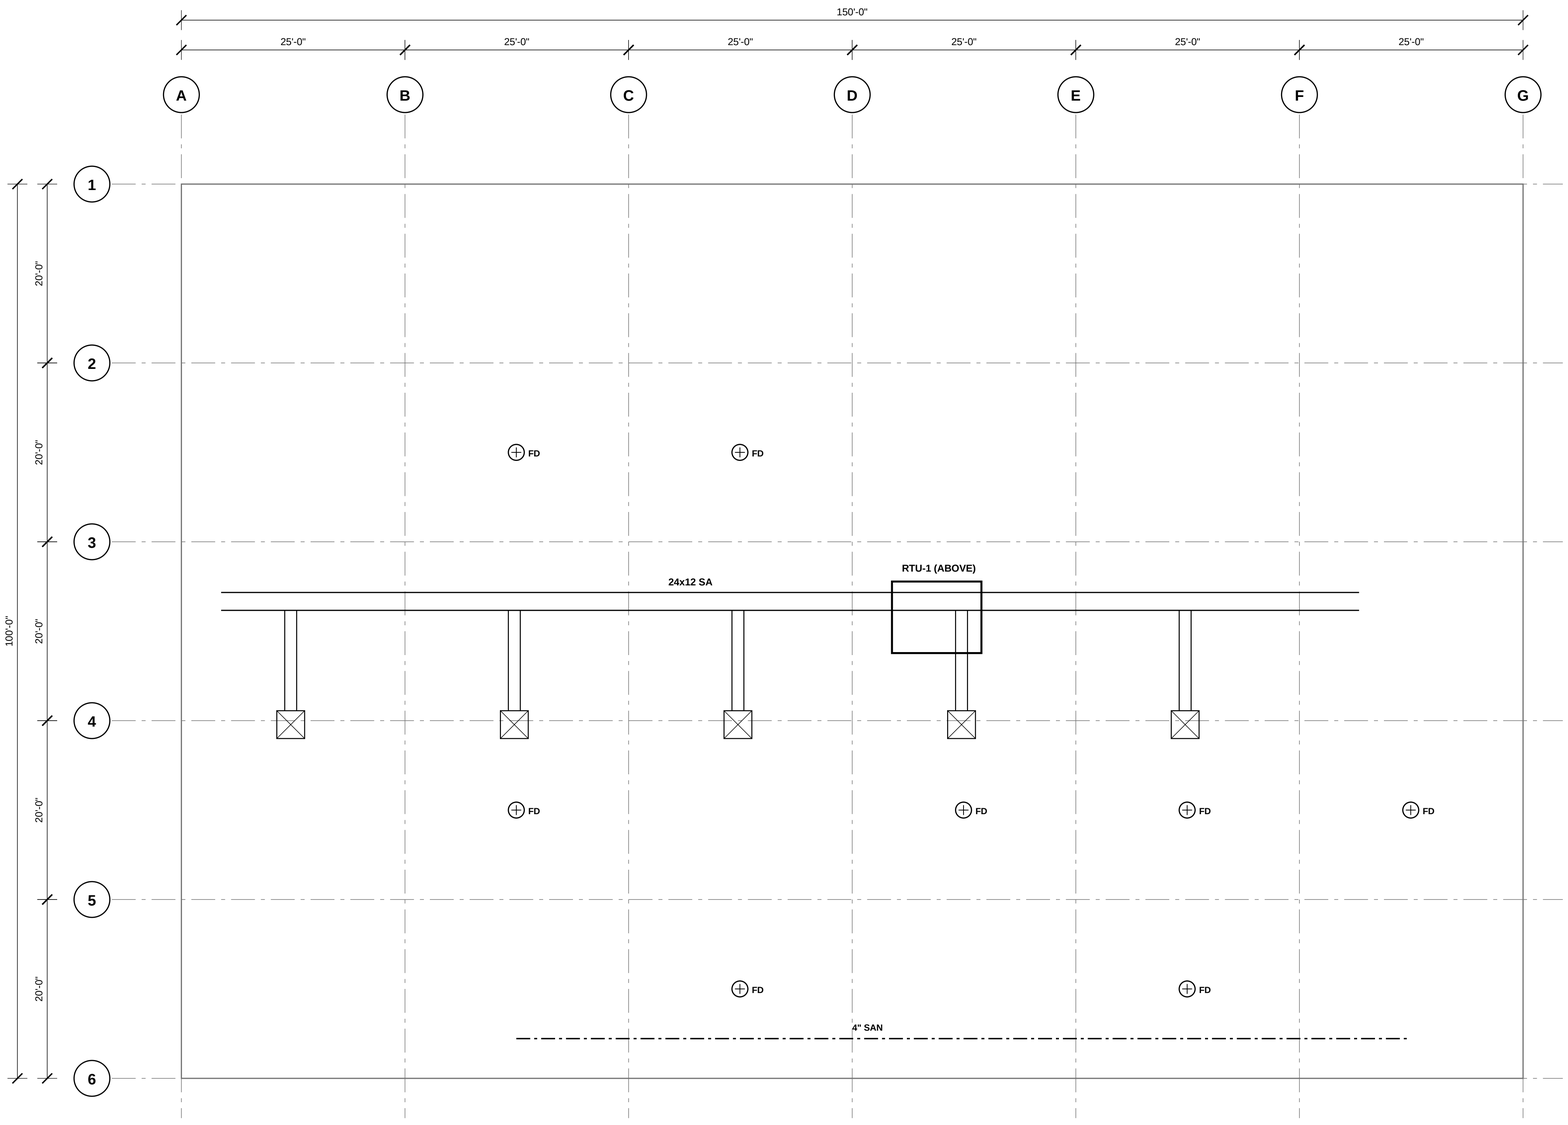

LEGEND

FD FLOOR DRAIN
[X] SUPPLY DIFFUSER 24x24
---- SUPPLY DUCT
-- - -- SANITARY PIPING

1 **MECHANICAL AND PLUMBING PLAN**

SCALE: 1/8" = 1'-0"

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO. 2026-118
DATE 04/02/2026
DRAWN JRM
CHECKED KLT

SHEET TITLE

MECHANICAL AND PLUMBING PLAN

SHEET NUMBER

M1.01

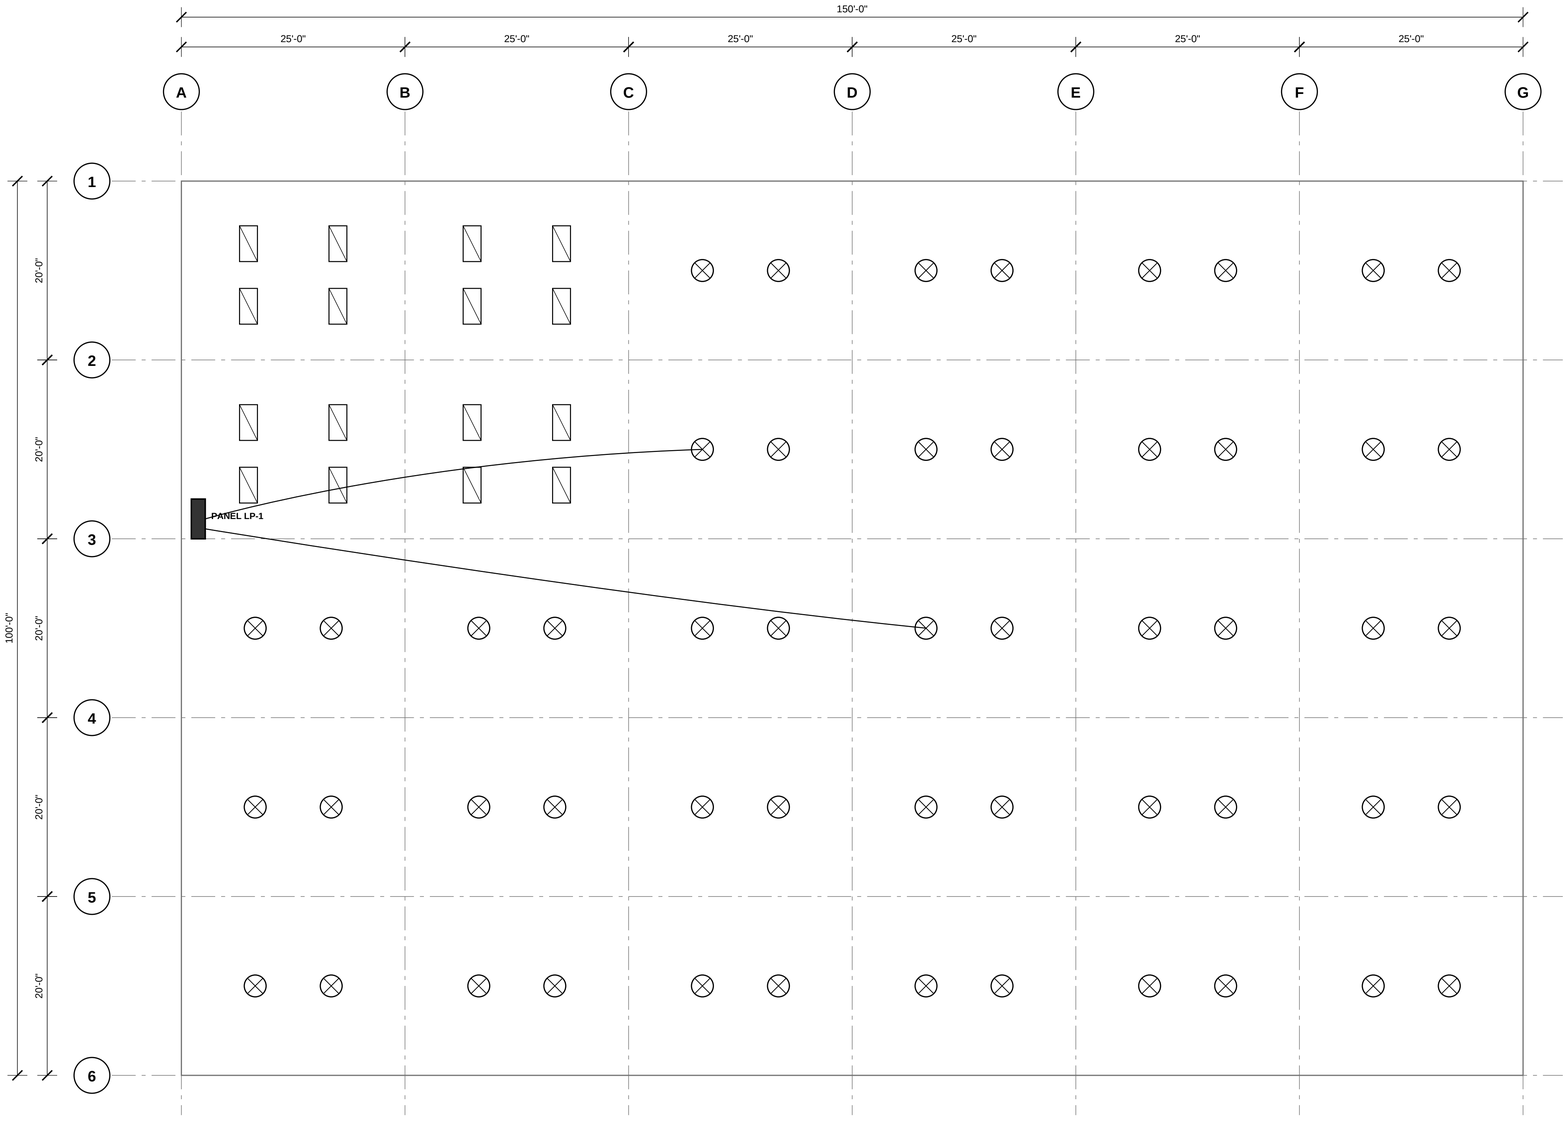

FIXTURE SCHEDULE

TYPE A 2x4 LED TROFFER (OFFICES)
TYPE B LED HIGH BAY 24,000 LM (WAREHOUSE)
ALL FIXTURES ON LP-1, 277V.

1 **ELECTRICAL LIGHTING PLAN**

SCALE: 1/8" = 1'-0"

NORTHPOINT
STRUCTURAL ENGINEERS
1200 Harbor Way, Suite 400

PROJECT

RIVERSIDE
DISTRIBUTION CENTER
4410 Industrial Parkway

REVISIONS

1	ISSUED FOR BID	03/14/2026
2	ADDENDUM 1	04/02/2026

PROJECT NO. 2026-118
DATE 04/02/2026
DRAWN JRM
CHECKED KLT

SHEET TITLE

ELECTRICAL LIGHTING PLAN

SHEET NUMBER

E1.01